

Parts needed to mount the HR-ALU extrusion



Extrusion (A)



Cable gland (B)



End cap (C)



WP LED Strip (D)



Cover (E)


Tools needed for mounting:

- drill
- mounting glue
- silicone


NOTE! All LED strips must be connected to a 12 V or 24 V power supply.

IMPORTANT: The manual presents the simplest mounting procedure.
More mounting procedures and related accessories can be found at klusdesign.eu


1. Drill a hole for the power cable in the extrusion (A) and insert the gland (B).

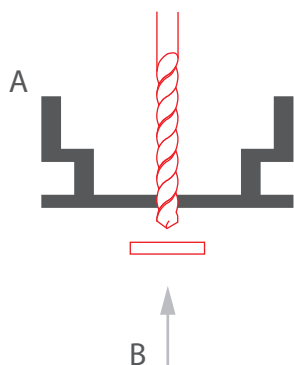


2. Attach the end cap (C) in the extrusion with glue.

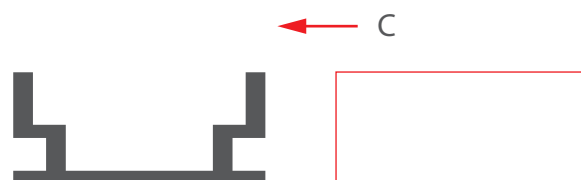

3. Feed the power cable from the LED strips (D) through the gland. Mount the LED strip (D), seal the entire assembly with silicone. Insert the cover (E) into the extrusion and again seal with silicone. [Download the extrusion sealing instructions at www.klusdesign.com](http://www.klusdesign.com)

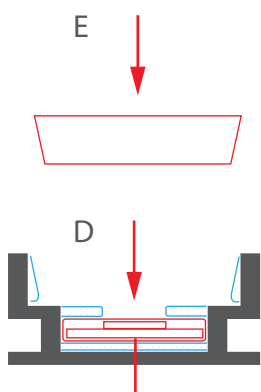

4. Feed the power cable. Spread glue in the mounting channel.

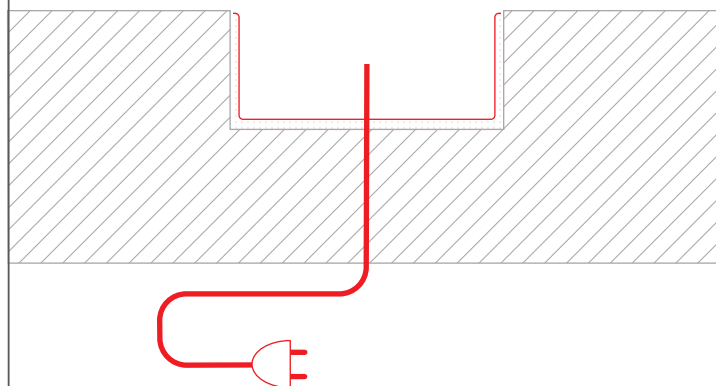

5. Connect power to the LED strips. Place the extrusion in the mounting channel. Leave the dilatation joint with a width of min. 6 mm.

