


CHESS



GENERAL DETAILS

REFERENCE:	K50506
INSTALLATION:	Modular ceiling
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Rectangular
LIGHT DIRECTION:	Fixed
REGULATION:	No dimmable · 1..10V · Push · DALI
OPTIC COVER:	Opal · Sky
UTILIZATION:	Indoor
WARRANTY:	5 years

MEASURES

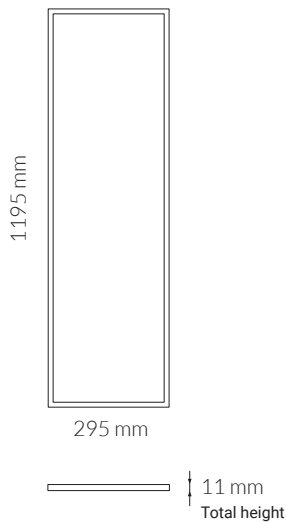

GENERAL DIMENSIONS

HEIGHT:	11 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m
MINIMUM HEIGHT OF FALSE CEILING:	36 mm

ELECTRICAL DETAILS

LAMP:	LED
PROTECTION CLASS:	□
WATTS:	37 W
EFFICIENCY 3000K OPAL:	97 lm/W
EFFICIENCY 4000K OPAL:	105 lm/W
EFFICIENCY 6000K OPAL:	108 lm/W
3000K lm OPAL:	3589 lm
4000K lm OPAL:	3885 lm
6000K lm OPAL:	4000 lm
EFFICIENCY 3000K SKY:	54 lm/W
EFFICIENCY 4000K SKY:	59 lm/W
EFFICIENCY 6000K SKY:	61 lm/W
3000K lm SKY:	2010 lm
4000K lm SKY:	2176 lm
6000K lm SKY:	2240 lm
ENERGETIC EFFICIENCY:	A+
DRIVER:	Included
mA:	900 mA
VOLTAGE:	230V
LIFE TIME:	50.000 h
CRI:	≥ 80

ENERGY LABEL

K50506

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

} LED

The lamps cannot be changed in the luminaire.

874/2012

