




GENERAL DETAILS

REFERENCE:	K50300
INSTALLATION:	Recessed with frame
EXTERNAL FINISH:	White
MATERIAL:	Aluminium
IP DEGREE:	IP44
UGR:	16.2
FORM:	Round
LIGHT DIRECTION:	Fixed
REFLECTOR:	40°
UTILIZATION:	Indoor
WARRANTY:	3 years

MEASURES




GENERAL DIMENSIONS

HEIGHT:	85 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m
CUT OUT:	Ø86 mm
MINIMUM HEIGHT OF FALSE CEILING:	110 mm




ELECTRICAL DETAILS

LAMP:	LED
PROTECTION CLASS:	□
WATTS:	7 W
EFFICIENCY 3000K:	113 lm/W
EFFICIENCY 4000K:	114 lm/W
3000K lm:	790 lm
4000K lm:	800 lm
ENERGETIC EFFICIENCY:	A+
DRIVER:	Included
mA:	350 mA
VOLTAGE:	230V
LIFE TIME:	35.000 h
CRI:	≥ 80

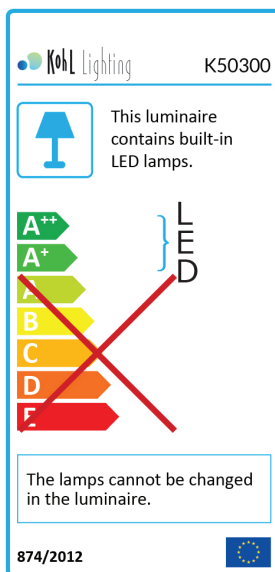ENERGY LABEL



ACCESORIES

REFLECTOR	REF.
  	KAC50300.D15 - KAC50300.D24 - KAC50300.D60